

PREPARE PRESERVE PROTECT

Roxil[®]

BEESWAX WOOD POLISH



Application

GUIDELINES

Application Guidelines

What You Will Need



ROXIL® BEESWAX
WOOD POLISH



LINT-FREE
CLOTH

IF DEEP CLEANING IS REQUIRED BEFORE APPLICATION:



ROXIL® WOOD
SCRUB GEL



PAINT
BRUSH



STIFF WIRE OR NATURAL
BRISTLE BRUSHES



SANDPAPER

Preparation

Before applying **Roxil® Beeswax Wood Polish** remove any previous coatings and make sure that the surface is clean and in good condition. **Roxil® Beeswax Wood Polish** is ideal for maintaining everyday household furniture and woodenware, or as part of a restoration process. To remove heavy grime, **Roxil® Wood Scrub Gel** and light sanding are recommended. Always wash the surface with clean water after scrubbing. Allow the wood to dry before sanding and applying the wax.

Test Area

Apply first on a small test area to test the finish. Wood type and condition will determine the final look. **Roxil® Beeswax Wood Polish** has a slight darkening effect.

Maintenance

Periodic maintenance is required to maintain a high sheen surface. Spot maintenance may be needed in areas of high use or following a heavy spill. Once wood is treated with **Roxil® Beeswax Wood Polish**, cup rings can easily be removed with a quick spot treatment.



Coverage

Coverage rate: 1 m² per 10 – 20 ml*

Pack size	Area treated*
300 ml	15 – 30 m ²


* Based on the product being applied in a single coat. Coverage will vary depending upon the overall porosity of the substrate to be treated, use as a guide only.



Application



1 Ensure the wood surface is clean and dust-free. Fold the lint-free cloth to create a point that can be controlled by the index finger. Load this point with a generous amount of **Roxil® Beeswax Wood Polish**.

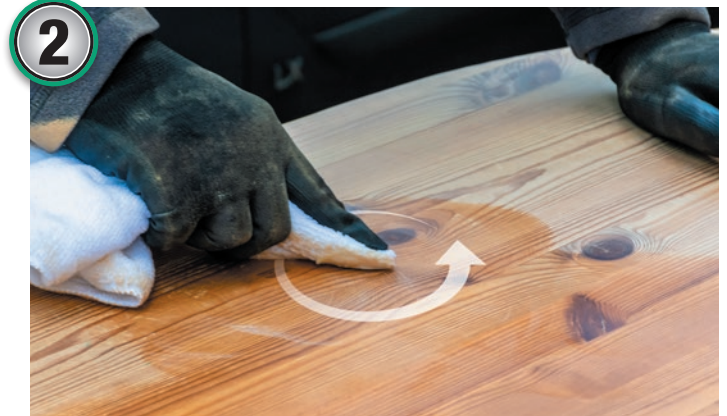

2 Apply the wax to the wood in manageable sections, using circular motions. This will ensure the wax is pushed into the wood. Don't worry about streaks or uneven distribution at this stage.




3 Once the entire surface is covered, bunch up the cloth and start working the polish into the wood following the grain. This will reduce any streaks, even out the distribution and smooth out any clumps.



4 Allow the wax to penetrate for 30 minutes then buff the surface with a clean cloth to bring out that natural lustre. Wood regularly treated with **Roxil® Beeswax Wood Polish** will stay nourished and protected from spills.

Deep Cleaning

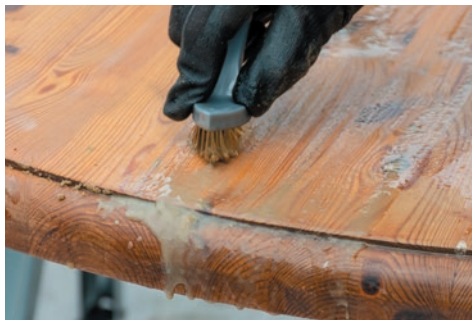

In some cases, light coatings or grime need to be removed before applying **Roxil® Beeswax Wood Polish**. Apply Roxil® Wood Scrub Gel according to instructions – leave for 1 hour, then brush off the grime with flowing water and a stiff wire or natural bristle brush, depending on the severity of the grime. Allow the wood to dry completely then lightly sand and brush away any dust before applying the wax. Any heavy coatings, such as old paint or varnish, should be removed with a paint stripper or deep sanding.



Roxil®

BEESWAX WOOD POLISH

- Enhances the grain and natural colour of wood
- Imparts a gloss finish
- Subtle floral fragrance
- Seals and protects surface from moisture
- Suitable for treating all types of unsealed indoor soft and hard woods
- Removes minor scuffs and scratches



Safeguard Europe Ltd
Redkirk Close,
Horsham, West Sussex,
United Kingdom. RH13 5QL

T 01403 210204 **F** 01403 217529

E info@safeguardeurope.com

www.safeguardeurope.com

www.roxil.com