

LOOK FOR THE FULL DRYZONE® SYSTEM RANGE TO TACKLE PROBLEMS ARISING FROM RISING DAMP AND CONDENSATION



Safeguard Europe Ltd., Redkiln Close, Horsham, West Sussex, RH13 5QL.
T +44 (0)1403 210204 F +44 (0)1403 217529
E info@safeguardeurope.com www.safeguardeurope.com



PROFESSIONAL GRADE MOULD REMOVAL AND PREVENTION KIT

USAGE INSTRUCTIONS

ELIMINATE MOULD

AND KEEP IT AWAY



BUILT TO PROTECT

DRYZONE®

PROFESSIONAL GRADE MOULD REMOVAL AND PREVENTION KIT



Product Description

Dryzone® Professional Grade Mould Removal and Prevention Kit is a two part, high volume mould treatment pack that removes mould and protects against further colonisation. Taking a dual action approach allows for rapid cleaning using the **Dryzone® Mould Eliminator** and longer-term fungicidal protection using the **Dryzone® 100 Mould Sanitiser**. Both products are effective in their domain allowing a mould infestation to be removed and treated in under 30 minutes with little or no scrubbing required.

Application Information

Start by removing any loose material from the surface before spraying **Dryzone® Mould Eliminator** liberally onto the affected area. Wearing standard protective gloves and goggles are recommended. Pour the required amount of **Dryzone® Mould Eliminator** into 5-litre pressure sprayer included in the kit. Care should be taken to ensure that **Dryzone® Mould Eliminator** does not splash onto household plants or soft furnishings.

Dryzone® Mould Eliminator should start to work straight away. When using the product around a shower or bath you may want to rinse off when the mould is no longer visible. When used on painted surfaces, use the microfibre cloth to dab the surface to remove excess material. Ensure **Dryzone® Mould Eliminator** has been rinsed or wiped away prior to applying **Dryzone® 100 Mould Sanitiser**.


Clean the sprayer with cold water then fill with **Dryzone® 100 Mould Sanitiser**. Apply 1 litre of product per 5 m² of surface. The coverage may vary depending on the surface. Take the appropriate precautions as outlined above for the **Dryzone® Mould Eliminator**.

Leave **Dryzone® 100 Mould Sanitiser** for 1 hour for maximum effect prior to washing off. For best results wipe the area with the microfibre cleaning cloth provided in the kit to remove any remaining spores from the surface. Apply the **Dryzone® 100 Mould Sanitiser** every 6 months or when mould reappears.

*Note: **Dryzone® Mould Eliminator** may discolour coloured bathroom grout. If this is of concern, carry out a test application in a small inconspicuous area and leave for 24 hours before carrying out full treatment. **Dryzone® 100 Mould Sanitiser** can be used in isolation on delicate surfaces affected by mould as well as a pretreatment when a surface is being painted. Testing a small inconspicuous area is recommended before full treatment. Be sure to empty and clean the 5-litre sprayer after use. Neither **Dryzone® Mould Eliminator** or **Dryzone® 100 Mould Sanitiser** should be stored in the sprayer.*

How the Kit Works

Mould and mildew can be a nightmare. The unsightly appearance, musty smells and stubborn staining can transform a beautiful space into a dank and unhealthy environment. If it is not dealt with properly, decor and clothes can be irreparably damaged and health conditions can be exacerbated. Standard household cleaners can often just hide the symptoms or make the situation worse!

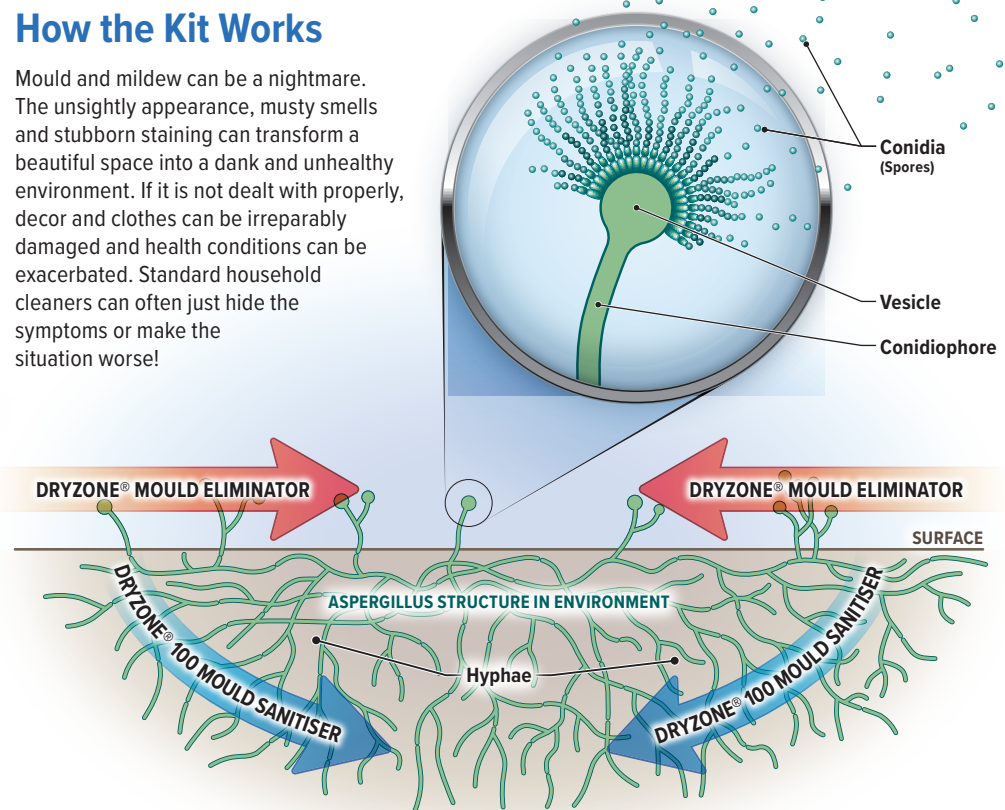

Fortunately, the **Dryzone® Professional Grade Mould Removal and Prevention Kit** is here to help. The diagram above shows a close up of a typical mould that commonly affects damp walls and surfaces. **Dryzone® Mould Eliminator** removes the mould at surface level, whilst **Dryzone® 100 Mould Sanitiser** penetrates the mould to remove the sub-surface hyphae, which could lead to regrowth.

This material and their containers must be disposed of in a safe way. Do not empty into drains. Do not contaminate ground, waterbodies or watercourses with chemicals. Once the container is empty, rinse out onto the treated surface prior to disposal. The empty container is suitable for recycling. For full application instructions, refer to the technical datasheet which is available upon request from Safeguard at: www.safeguardeurope.com