


# Oldroyd® Xv 20 Cavity Drainage Membrane

## Product Description

**Oldroyd® Xv 20 Cavity Drainage Membrane** is made from polypropylene and is black in colour. The membrane features a combination of embossed 'X' pattern and 20 mm studs. It is suitable for application to floors as part of a waterproofing strategy. It is loose laid on floors.

Accreditations	
	

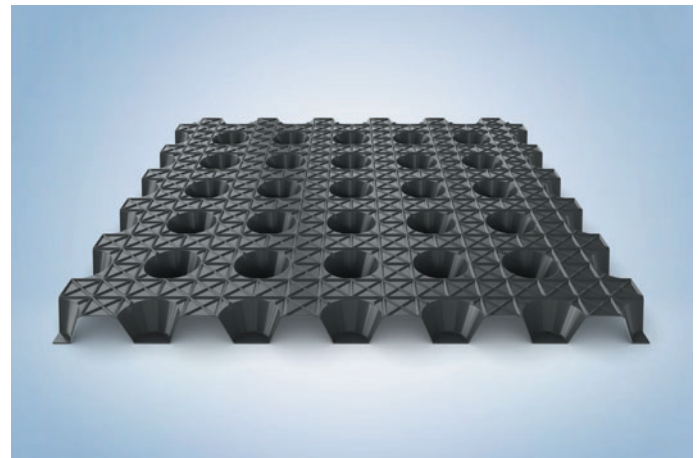

## Benefits

- Resistant to water and water vapour
- Resistant to ground salts
- Heavy duty and very strong
- Increased tensile strength due to unique 'X' pattern feature
- Highly durable
- No maintenance required

## Properties

Appearance	Black, moulded polypropylene membrane incorporating raised studs
Size(s) & Packaging	2 × 15 m roll
Coverage	30 m <sup>2</sup>
Service Life	For the life of the structure in which it is incorporated
Storage	Cool, dry conditions

## Application Information

### Preparation

Repair any significant defects in the substrate. If the floor surface to receive the membrane is very uneven it is advisable to level out first.

### Application

Roll the membrane out across the surface of the floor; ensuring that the membrane meets the walls at all edges. All joints to be sealed using the appropriate sealing tape. Please call our technical department for further advice.

## Other Information

**Oldroyd® Xv 20 Cavity Drainage Membrane** is produced in accordance with ISO 9001 and ISO 14001 quality and environmental management systems.

**Oldroyd® Xv 20 Cavity Drainage Membrane** is non-hazardous to the environment.

*Information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that products, techniques and codes of practice are under constant review and changes occur without notice; please ensure you have the latest updated information.*