


Oldroyd® Xv Green Roof Membrane

Product Description

Oldroyd® Xv Green Roof Membrane is made from polypropylene and is green in colour. The membrane features a combination of embossed 'X' pattern and 7 mm studs. It is primarily used as part of a green roof drainage system. It is fixed by means of roof plugs and nails on pitched roofs.

Accreditation

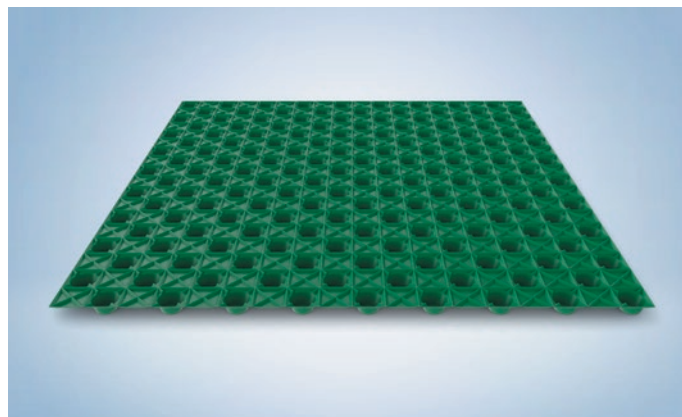

Benefits

- Resistant to water
- Easy to install and stable
- Rubberized friction layer
- Increased tensile strength due to unique 'X' pattern feature
- Highly durable
- No maintenance required

Properties

Appearance	Green, moulded polypropylene membrane incorporating raised studs
Size(s) & Packaging	2 × 20 m roll
Coverage	40 m ²
Service Life	For the life of the structure in which it is incorporated
Storage	Cool, dry conditions

Application Information

Preparation

Surface to receive membrane should be waterproof, sound and structurally stable.

Application

The membrane is rolled out on top of an appropriate waterproof layer. For stability, the membrane is mechanically fixed using Oldroyd® Turf Roof Plugs and nails. The rolls of membrane have flat edges for overlap joints where mastic or Oldroyd® Sealing Rope can be used to provide a seal. Oldroyd® Turf Roof Hooks are utilised along the retaining edge of the eaves.

Other Information

Oldroyd® Xv Green Roof Membrane is produced in accordance with ISO 9001 and ISO 14001 quality and environmental management systems.

Oldroyd® Xv Green Roof Membrane is non-hazardous to the environment.

Information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that products, techniques and codes of practice are under constant review and changes occur without notice; please ensure you have the latest updated information.