

Safeguard® Fastframe Drylining System

Product Description

The **Safeguard® Fastframe Drylining System** is intended for use after the Oldroyd® Xv Cavity Drainage Membrane system has been installed. For installation instructions, refer to the Oldroyd® Xv Cavity Drainage Membrane technical datasheet (available upon request from Safeguard). The **Safeguard® Fastframe Drylining System** is faster and easier to install than traditional “timber batten” approaches.

Benefits

- Create various cavity widths
- Fast and efficient installation

Properties

Framing Method	Cavity Width
Close Reach (CR)	20 – 25 mm
Standard Reach (SR)	25 – 60 mm
Extended Reach (XR)	50 – 150 mm

Application Information


Install Oldroyd® Brick Plugs to the wall at 600 mm intervals to accommodate the **Safeguard® Fastframe Drylining System**. Fix the Fastframe Reach Brackets to the Oldroyd® Brick Plugs using a screw which doesn't exceed the length of the plug (no. 12 screw). The Fastframe Reach Brackets are supplied flat, so once they are installed, fold the arms of the brackets away from the brick plugs until they're perpendicular to the wall.

The depth of the Fastframe Reach Brackets will depend upon the requirements for insulation, services, or providing a flat surface over uneven, older walls. Different sized Fastframe Reach Brackets are available, however the brackets may also be trimmed to the required depth.

Position the Fastframe Floor Track at the chosen distance away from the wall, but **do not** fix it into place yet. Position the first Fastframe Dry-liner Channel parallel to the Fastframe Reach Brackets. Where needed, also install a Fastframe Ceiling Track at this point and fix loosely with a screw at either end. Ensure that the Fastframe Dry-liner Channels are upright and completely plumb by using a spirit level.



Example System

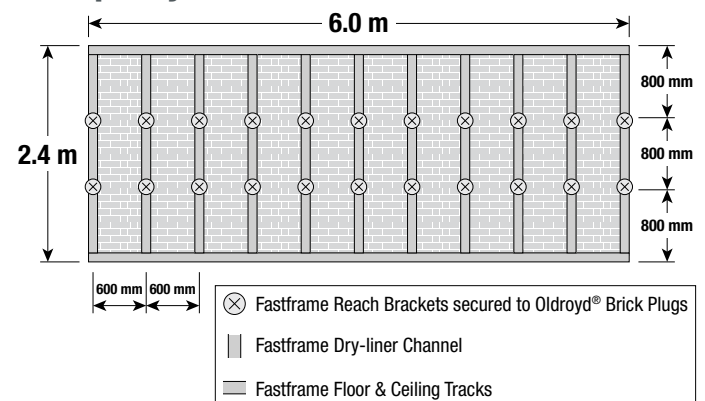

Material requirements for this example system:

Product name	Amount	Unit size
Fastframe Reach Bracket	22	N/A
Fastframe Dry-liner Channel	11	2.4 m
Fastframe Floor & Ceiling Tracks	4	3 m
Oldroyd® Brick Plug	22	N/A
No.12 Screws	22	N/A
Pan Head Metal to Metal Screws	66	11 mm
Plasterboard to Metal Screws	75	25 mm
Plasterboards	5	1.2 × 2.4 m

Information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that products, techniques and codes of practice are under constant review and changes occur without notice; please ensure you have the latest updated information.