

Drybase® Flex SV Membrane

Product Description

Drybase® Flex SV Membrane is a damp-proof and salt-resistant low-profile membrane for protection against moisture ingress in walls. The membrane is a 1 mm thick flexible polypropylene sheet, and has a grey PP non-woven fleece on both sides. The fleece ensures good adhesion to the wall by means of Drybase® Flex Adhesive, and to the plaster.

Benefits

- No need for plugs and drilling
- No unnecessary penetration of membrane
- Accepts plaster finish directly
- Flexible and versatile
- Fast application
- Waterproof and salt resistant

Properties


Appearance	Membrane with grey fleece
Material	Polypropylene
Thickness	1 mm
Size(s) & Packaging	7 kg roll
Coverage	1 m × 15 m
Salt Resistance	Excellent (salt bath testing conducted in lab conditions)
Reaction to Fire	EN 13501 Class F
Tear Resistance	85 N
Storage	Dry conditions

Application Information

Preparation

Before **Drybase® Flex SV Membrane** can be applied, any structural defects on the substrate must be fixed. Clean the surface of the substrate to ensure maximum bonding of adhesive. Remove all surface laitance, loose particles, paint, etc. by means of wire brushing or light sandblasting.

Cut the membrane to the required area, making sure that there is a 25 mm gap between the floor and the membrane.

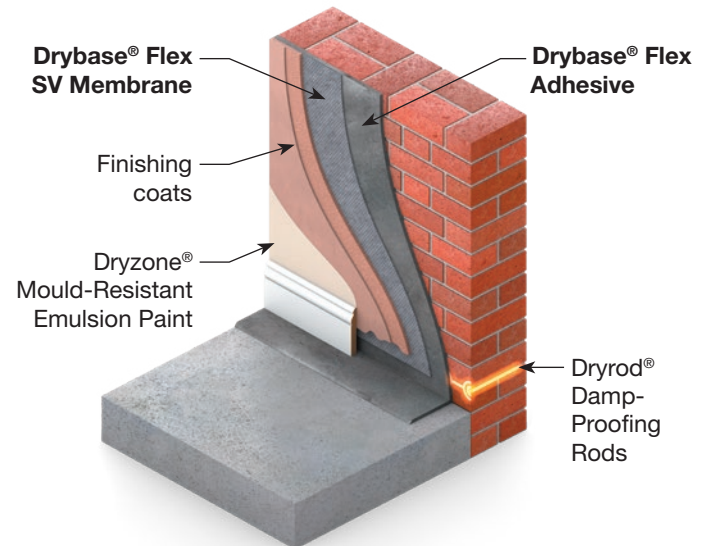

Application

Once the Drybase® Flex Adhesive has been applied to the wall, offer the **Drybase® Flex SV Membrane** up to the adhesive and use a trowel to apply gentle pressure spreading from the centre outwards. Ensure that full contact is established between the membrane and the adhesive with no bubbles.

Note: Use Drybase® Flex Adhesive within 30 minutes of mixing. Once the adhesive is on the wall, **Drybase® Flex SV Membrane** must be adhered to it within 10 minutes.

When the adhesive has cured, surface finishes can be applied such as Bonding or Hardwall plaster prior to a skim finish.

For detailed application instructions, refer to the full application guidelines which are available upon request from Safeguard.

Other Information

For health and safety information see the Safety Datasheet (available upon request).

Drybase® Flex SV Membrane is produced in accordance with ISO 9001 quality and environmental management systems.

Drybase® Flex SV Membrane is non-hazardous to the environment.

Information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that products, techniques and codes of practice are under constant review and changes occur without notice; please ensure you have the latest updated information.